



Site Lighting

LED Twin Tripod Telescopic Site Light | 2x 20w

Wattage	2 x 20w SMD LED (40w in total)
Lumens	2x 1600 lumens (3600lms in total)
Colour Temperature	6500k
Voltage	220-240V
Plug:	Fitted 3 pin Plug
IP rating	IP65
Cable Length	3m
Dimensions	Tripod- 1000mm (max) x 1118mm Tripod and light - 1000mm (max) x 1518mm
Applications	Ideal for Emergency rescue operations, outdoor event security, Site maintenance, Infrastructure Projects and any other places that need illuminated by Portable LED light.






Site Lighting


LED Twin Tripod Telescopic Site Light | 2x 20w




Turn adjustment knob anti-clockwise to unlock. Slide bracket down the centre pole to spread the legs to the desired size.

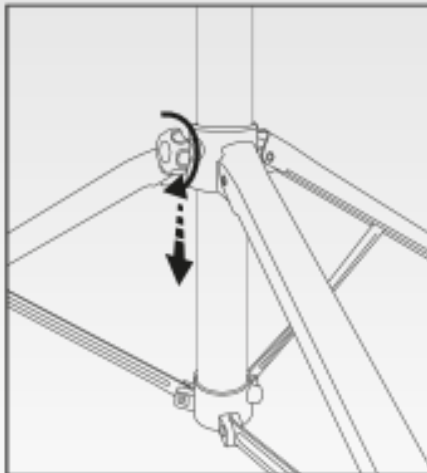


Turn adjustment knob clockwise to lock legs into the current position, **DONOT OVERTIGHTEN**.

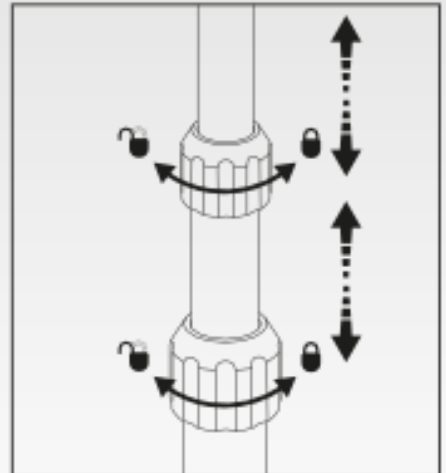


Loosen the compression nut by twisting anti-clockwise, extend the center pole and secure by retightening.

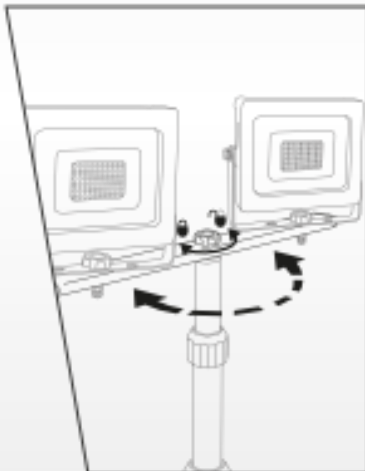


Turn knob anti-clockwise to unlock. Crossbar has a horizontal rotation of 360°, ensure cable does not tangle with the stand. Turn knob clockwise to lock in the desired location.

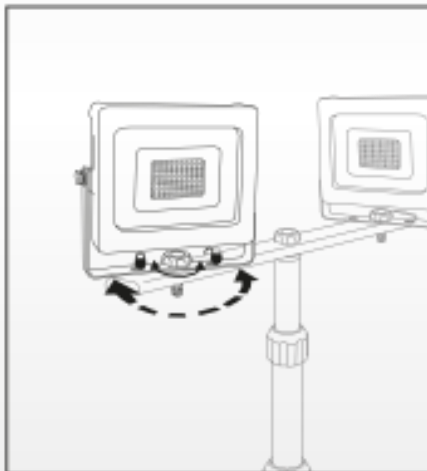


Turn knob anti-clockwise to unlock. Each flood bracket has a horizontal rotation of 360°, ensure cable does not tangle with the stand. Turn knob clockwise to lock in the desired location.

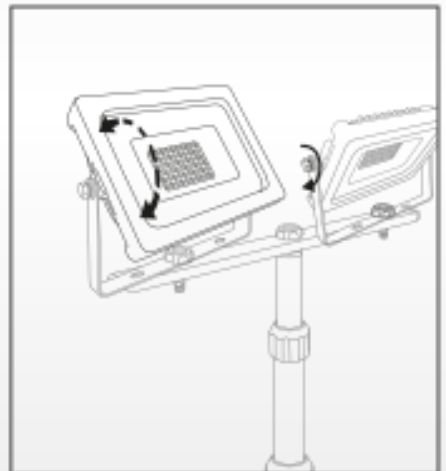


Floodlight has a vertical rotation of 360°, ensure cable does not tangle with the bracket. Periodically check the bolt and tighten if needed as this will become loose over time.

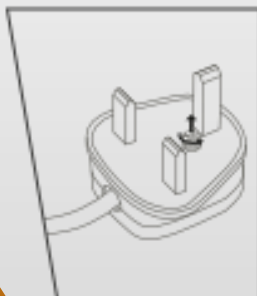


Although NOT recommended - should you need change the fuse or re-wire, follow these steps.

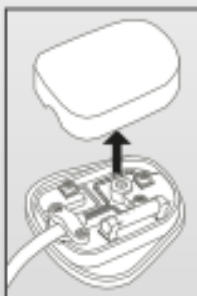


Ensure plug has cooled. Loosen screw and remove plug cover.

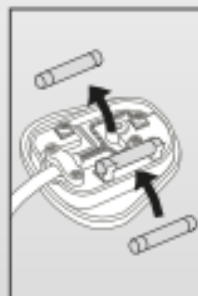

Remove 13-amp fuse and replace with an operational 13-amp fuse

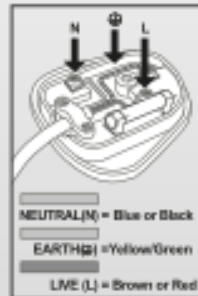

Ensure wires are securely attached with no loose bare wires. Product requires Earthing.

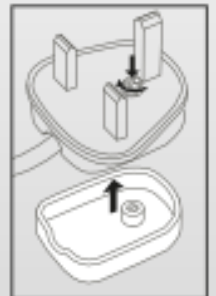

Replace cover and tighten screw to secure. Plug IP20 and should be used in dry locations.