

# Cosmic



## KEY ADVANTAGES

- Complete power, wide coverage of wattage
- Wattage from 60W to 300W optional
- Power Selectable (Optional)
- High energy savings compared to systems with traditional discharge lamps
- Light-on-demand feature with optional motion sensor
- Robust design
- Emergency lighting with optional battery
- High visual comfort
- No hazardous materials
- Fast ROI thanks to long life span and reduced maintenance
- Compact housing optimised for heat dissipation and reduced dust accumulation
- Dedicated range of mounting accessories

## TYPES OF APPLICATION

- CAR PARKS
- LARGE AREAS
- INDUSTRIAL HALLS & WAREHOUSES
- SPORT FACILITIES





CAR PARKS




LARGE AREAS

INDUSTRIAL  
HALLS &  
WAREHOUSESSPORT  
FACILITIES

60W/100W





Universal Reflector

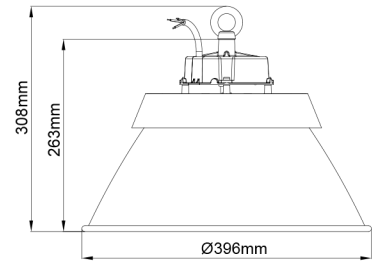


Tall Reflector

150W





Universal Reflector

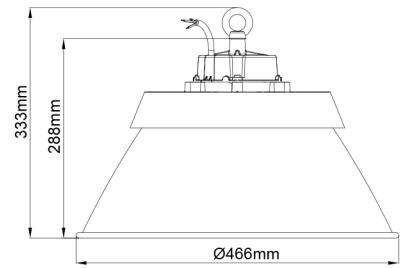


Tall Reflector

200W/240W

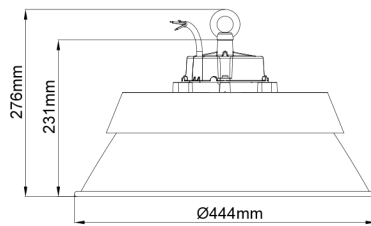

Universal Reflector

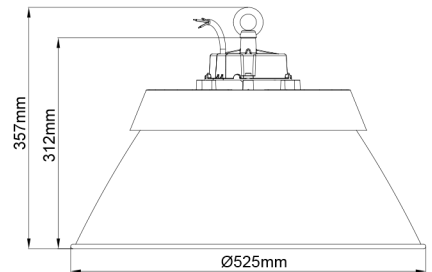

Tall Reflector

**GENERAL INFORMATION**

Driver included	Yes
CE mark	Yes
RoHS compliant	Yes
SAA Mark	Yes
Safety features	Open circuit protection Short circuit protection Overvoltage protection
Testing standard	LM-79-19(all measurements in ISO17025 accredited laboratory)

**HOUSING AND FINISH**

Housing	Aluminium
Optic	Polycarbonate
Protector	Polycarbonate (with integrated lenses)
Housing finish	Electrostatic polyester powder coating
Standard colour(s)	RAL 9017 black
Tightness level	IP 65
Impact resistance	IK 09

**OPERATING CONDITIONS**

Operating temperature range (Ta)	-30°C to + 45°C
Operating Humidity	10-90%RH
Mounting Option	Loop Hanging Bracket Mounting
Warranty	5 years

**Performance**

Power	60W/100W/150W/200W/240W/300W
Efficacy	210lm/W,190lm/W, 170lm/W,150lm/W
Power Efficiency	≥93%
Start Time	≤0.2S
Warm-up time to 60%	0.5S

**ELECTRICAL INFORMATION**

Electrical class	Class I EU
Nominal voltage	120-277V   50/60Hz
Power factor (at full load)	0.9
Surge protection options (kV)	6KV-Line-Line 6KV-Line-Earth
Electromagnetic compatibility (EMC)	EN 55015:2019/A11:2020, EN 61000 3-2:2019, EN 61000-3-3:2013, EN 61547:2009, EN 62493:2015
Control protocol(s)	1-10V, DALI2 (optional)
Sensor	Motion sensor (optional)
Emergency	Optional auxiliary battery
Total Harmonic Distortion(THD)	IEC 61000-3-2 Class C <20%
Driver Type	Constant current(CC)

For fixed Class 1 luminaires, overvoltage protective devices which comply with IEC 61643-11 shall be disconnected from the circuit.

withstand voltage 1.5KV 60S 10mA

※Lamp switch must control L line or control L and N lines.

**OPTICAL INFORMATION**


LED Type	SMD2835
Beam Angle	60° / 90° / 120°
Recommended installation height	4m to 12m
Color Tolerance	Ra70 ≤7 Ra80 ≤5
LED colour temperature	3000K / 4000K / 5000K / 5700K / 6500K
Colour rendering index (CRI)	CRI>70 standard CRI>80 optional
Upward Light Output Ratio (ULOR)	0%

※Ra measurement tolerance is ±2.


**LIFETIME OF THE LEDS @ TA 25°C**

All configurations	
L70B10	>100,000h
L80B10	>50,000h
L90B10	>30,000h
Switching Cycles	>100,000 times


**LIGHT DISTRIBUTIONS**

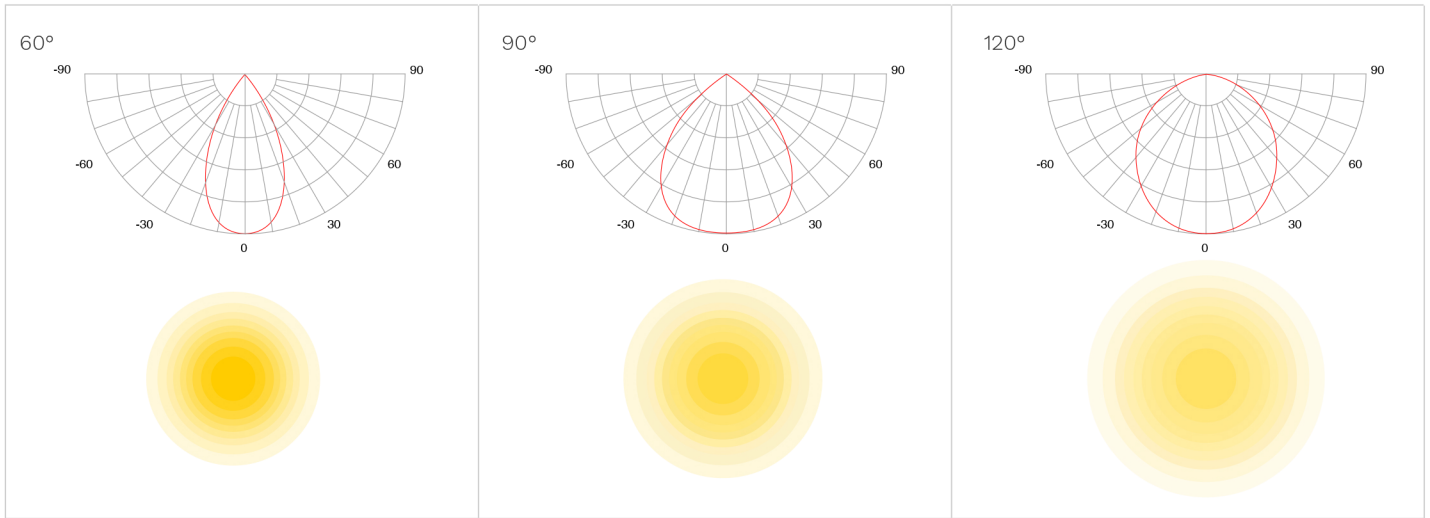

**OPTIONAL**



**ACCESSORIES**



When sensors are used, the power supply needs to be selected as a version without afterglow that can be turned off.

**PREMIUM VERSION**

POWER	LUMENS	EFFICACY
60W	12,600LM	210LM/W(Ra70)
	11,400LM	190LM/W(Ra80)
100W	21,000LM	210LM/W(Ra70)
	19,000LM	190LM/W(Ra80)
150W	31,500LM	210LM/W(Ra70)
	28,500LM	190LM/W(Ra80)
200W	42,000LM	210LM/W(Ra70)
	38,000LM	190LM/W(Ra80)

**PRO VERSION**

POWER	LUMENS	EFFICACY
60W	11,400LM	190LM/W(Ra70)
	10,800LM	180LM/W(Ra80)
100W	19,000LM	190LM/W(Ra70)
	18,000LM	180LM/W(Ra80)
150W	28,500LM	190LM/W(Ra70)
	27,000LM	180LM/W(Ra80)
200W	38,000LM	190LM/W(Ra70)
	36,000LM	180LM/W(Ra80)
240W	45,600LM	190LM/W(Ra70)
	43,200LM	180LM/W(Ra80)

※The Performance Data is tested base on 230VAC, 90° and 4000K for all versions  
 ※Power Consumption Tolerance ±5% (Apply to all versions)  
 ※Lumen Efficiency Tolerance ±5% (Apply to all versions)