

Driver Type/Brand: Ventronics

IK Rating IKo8

Wattage: 600w | 1200w | 1500w | 1800w

Lumens: 143lm/W

Colour Temperature: 5000K

Comes with Dali as standard

D4i, 0/10V, DMX Dimmable options available upon request

Get in <u>Contact with us</u> to request a Dimmable Option .

Application: Suitable for football stadiums, tennis courts, stadiums and other large sports venues.



12°/30°/60°

Beam Angle: symmetric;

40°x15°/60°x15°/100°x17°

/100°x60°/130°x25° asymmetric

Voltage input: AC 100 - 305V

Lifespan: 341,000 Hours

Rating: IP66

CRI: >80

Dimensions

Power Factor: >0.95

Warranty: 5 years with 2 years onsite

warranty

600w: 524mm x 628mm x

460mm

1200w: 724mm x 628mm x

455mm

1500w:936mm x 628mm x

580mm


1800w: 1091mm x 628mm x

470mm

Certificates: CE & RoHS




Luminous intensity distribution diagram

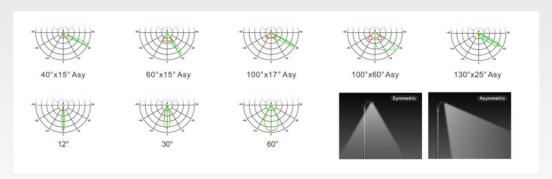


Dimensions(mm)







1200w



1500w



1800w






Installation





- For details, please refer to Installation Instruction.
- Installation must be performed by qualified person.
- Disconnect before installation.
- · Installation tools are not provided.

Mounting Bracket



Selection of mounting holes







Position Allowed

This Modular floodlight can be installed on pole, wall, ceiling or on a horizontal surface.









Position Not Allowed

Note: Considering the heat dissipation, load bearing and dust accumulation, some installation methods are not allowed.











