



Multiple Options

LED 5FT Non-Corrosive Tri Proof LED Batten | Emergency Option Available

Wattage:	50w
Lumens:	130lm/w
Colour Temperature:	65000k
Dimmable	No
Beam Angle:	120°
Voltage input:	220-240V
IP Rating:	IP65
Power Factor:	>0.9
Warranty:	2 year warranty
Dimensions/Cut out:	5ft - 1500mm x 96mm x 79mm
Certificates:	CE & RoHS
Material:	Aluminium + PC
Application:	Suitable for indoor use Warehouses, Shopping Outlets, hotels& Offices and outdoor use.






Multiple Options

LED 5FT Non-Corrosive Tri Proof LED Batten | Emergency Option Available


Standard

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 131.85 lm/W
MODEL	NCF ST	I _{max} (cd)	2143	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	48.2366	LOR (%)	100.0	S/MH (C90/270)	1.25	
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	6359.9	η UP, DN (C0-180)	1.4, 47.8	
NOMINAL FLUX (lm)	6359.89	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.4, 49.4	
LAMPS INSIDE	1	η up (%)	2.8	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	240.275	η down (%)	97.2	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

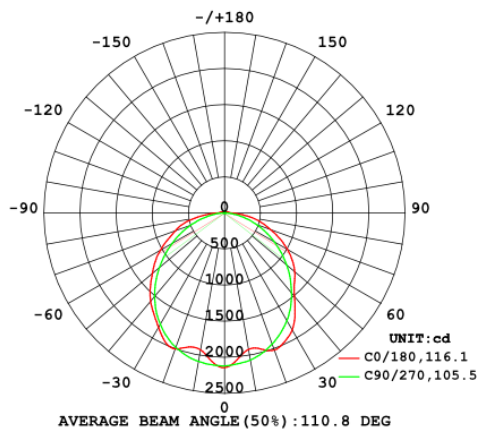

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

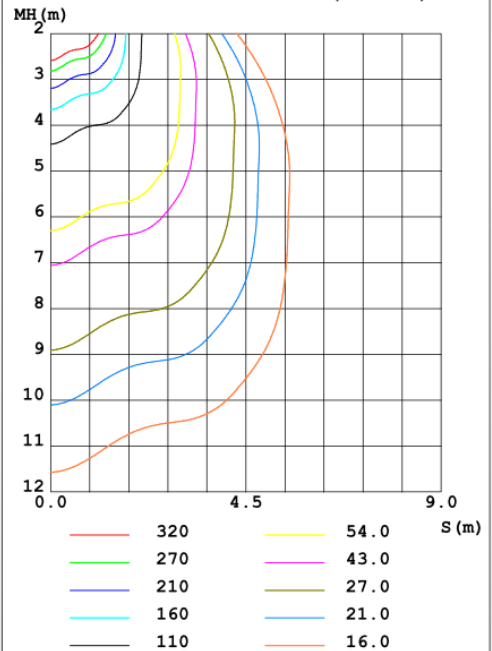



Multiple Options

LED 5FT Non-Corrosive Tri Proof LED Batten | Emergency Option Available

Emergency

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 126.13 lm/W
MODEL	NCF EM	I _{max} (cd)	2147	S/MH (C0/180)	1.24	
NOMINAL POWER (W)	49.9781	LOR (%)	100.0	S/MH (C90/270)	1.24	
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	6303.6	η UP,DN (C0-180)	1.4, 47.7	
NOMINAL FLUX (lm)	6303.65	CIE CLASS	DIRECT	η UP,DN (C180-360)	1.5, 49.4	
LAMPS INSIDE	1	η up (%)	2.9	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	240.383	η down (%)	97.1	CIBSE SHR MAX	1.35	

