


ATEX Lighting

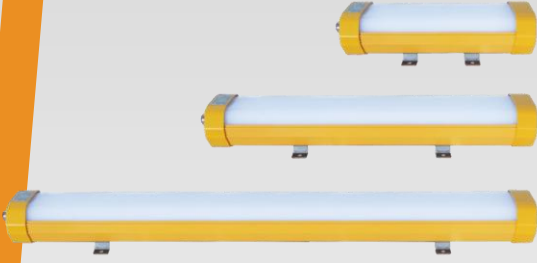

Atex Zone 1 - Meanwell Explosion Proof Linear LED light

Brand: Meanwell

Wattage 24w | 36w | 50w | 72w | 80w

Voltage 100-277Vac

lumens per watt
24w: 113lm/w
36w (2ft) :117lm/w
36w (4ft) : 130lm/w
50w: 125lm/w
72w: 96lm/w
80w: 95lm/w

IP Rating Ip66

IK Rating IK10


CRI >70

Colour (CCT) 5000k

Certificates CE, RoHS, ATEX



ATEX Lighting

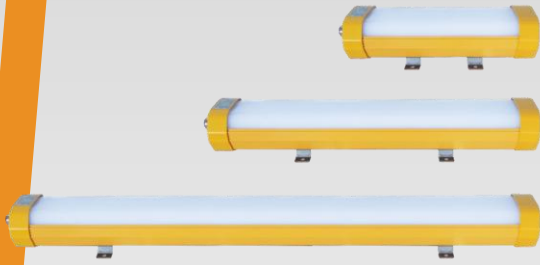

Atex Zone 1 - Meanwell Explosion Proof Linear LED light

Atex Certification

II 2G Ex eb mb IICT5 - T6 Gb
II 2D Ex tb IIIC T80°C Db

Dimensions

24w: 385mm x 126mm x 90mm
36w (2ft): 685mm x 126mm x 90mm
36w (4ft) : 1285mm x 126mm x 90mm
50w: 1285mm x 126mm x 90mm
72w: 1285mm x 126mm x 90mm
80w: 1285mm x 126mm x 90mm

Operating Temperature

-40 °C to +50°C

Applications

perfect for use in Wastewater treatment, oil and gas refineries, drilling rigs, petrochemical facilities, food and beverage facilities, tunnels, outdoor or indoor mounted general area lighting, and where flammable vapors, gases, ignitable dusts, fibers or flyings are present.

Certificates

CE, RoHS, ATEX


Warranty

5-Year Warranty




ATEX Lighting

Atex Zone 1 - Meanwell Explosion Proof Linear LED light

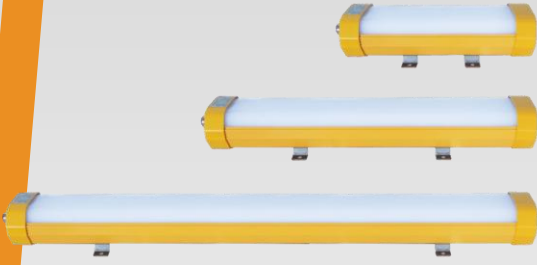

Key Features:

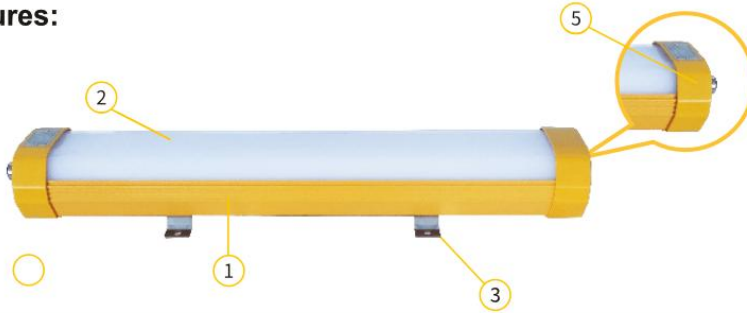

- ① Low-profile, lightweight design, high quality aluminum housing.
- ② Impact resistant lens.
- ③ Stainless steel bracket for ceiling mount.
- ④ Professional light distribution, uniform illumination through the entire space.
- ⑤ With single-ended feedthrough or double-ended feedthrough optional.

Photometric Data:

