



LED Asymmetric Flood Light | Wattage and 3CCT Adjustable | 120w | 240w | 500w

Chips and driver Type	Lumileds 2835 Chips + Meanwell
IK Rating	IK08
Wattage:	120w: Adjustable 80w, 100w, 120w 240w: Adjustable 150w, 200w, 240w 500w: Adjustable 300w, 400w, 500w
Lumens:	150lm/W
Colour Temperature:	3CCT Selectable: 3000K, 4000K and 5000K
Working Temperature:	-25°+50°
Beam Angle:	90°
Voltage input:	100-277V
Lifespan:	50,000 Hours
IP Rating:	IP66






LED Asymmetric Flood Light | Wattage and 3CCT Adjustable | 120w | 240w | 500w

Power Factor:	>0.95
Warranty:	5 years
Dimensions	120w: 303mm x 356mm x 70mm 240w: 364mm x 421mm x 70mm 500w: 364mm x 421mm x 70mm
Certificates:	CE & RoHS
Application:	Designed for precision lighting, it is ideal for sports facilities, car parks, logistics yards, building facades, construction sites, and perimeter lighting

Photometry

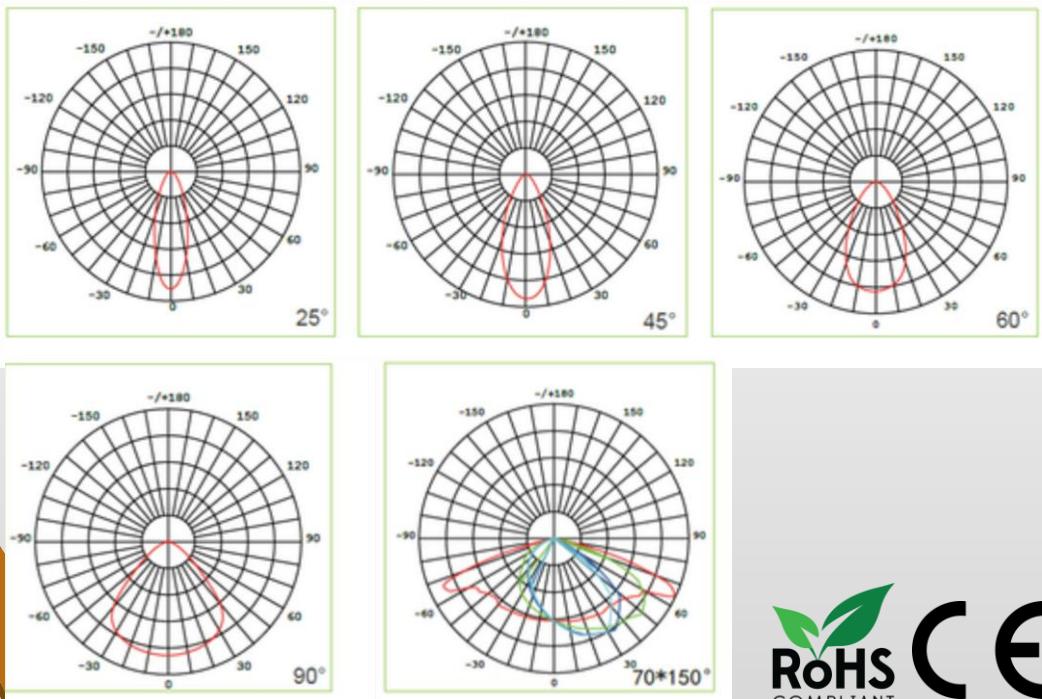

 RoHS
COMPLIANT

 LED
SUPPLY & FIT