



Multiple Options

**LED 5FT Plug & Play Batten |
Wattage Adjustable 30w, 35w,
42w, 54w | 3CCT | Emergency And
Microwave Sensor Plug and Play**

Wattage Adjustable:	5FT- 30w, 35w, 42w, 54w
Lumens:	150lm/w
Colour Temperature:	CCT Adjustable (4,000K / 5,000K / 6,500K)
Dimmable?	No
Beam Angle	120°
Voltage input:	220-240Vac
IP Rating:	IP20
Lifespan:	50,000 Hours
CRI:	>80
Working Temperature:	-20°C to +45°C
Power Factor:	>0.9





Multiple Options

**LED 5FT Plug & Play Batten |
Wattage Adjustable 30w, 35w,
42w, 54w | 3CCT | Emergency And
Microwave Sensor Plug and Play**

Warranty:	3 Year warranty
Dimensions/Cut out:	5ft – 1470 x 61 x 71mm – fixing distance 1265mm
Certificates:	RoHs CE
Material:	Aluminium PCB Heat Sink- White Steel Housing
Application:	Hospitals, Schools, Colleges, Universities, Offices, hallways, entrances and most indoor areas.

Plug & Play Features

The plug and play feature makes the emergency kit and microwave sensor seamless by allowing it to be installed directly into existing LED fittings without additional wiring, setup, or configuration, automatically working when connected.



Multiple Options





LED 5FT Plug & Play Batten |
Wattage Adjustable 30w, 35w,
42w, 54w | 3CCT | Emergency And
Microwave Sensor Plug and Play

Emergency Plug and Play



Microwave Sensor Plug and Play

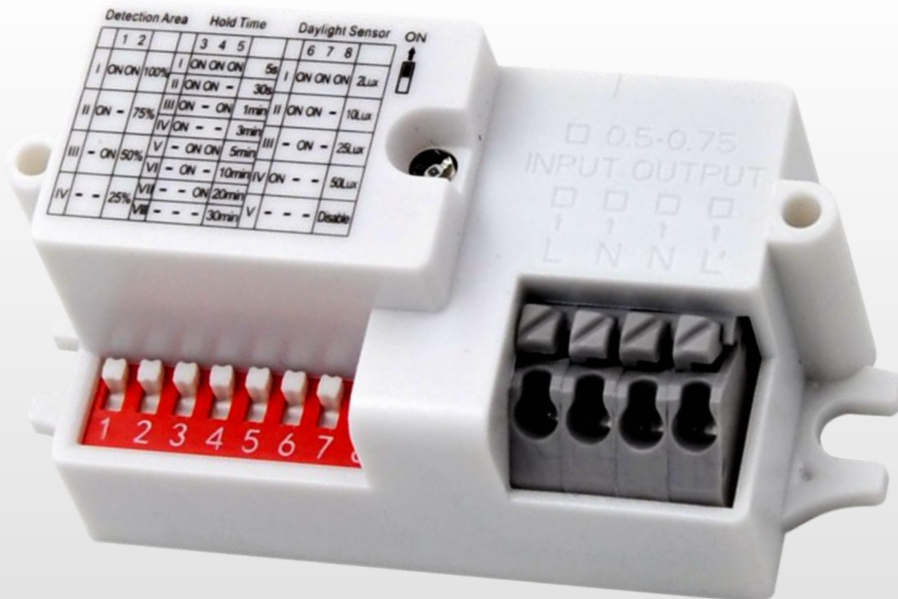

Detection Area			Hold Time			Daylight Sensor			ON
1	2		3	4	5	6	7	8	
I	ON ON	100%	I	ON ON ON	5s	I	ON ON ON	2Lux	
	II	ON	II	ON ON	30s				
II	ON	75%	III	ON - ON	1min	II	ON ON	10Lux	
	IV	ON	IV	ON -	3min				
III	ON	50%	V	ON ON	5min	III	ON	25Lux	
			VI	ON	10min	IV	ON	50Lux	
IV	ON	25%	VII	ON	20min				
			VIII	ON	30min	V	ON	Disable	

